

VB6.8


Parallel Interlock

Female:
Raw Material:A-2 with Tin Coated

Hardness:58-60 HRC

Male:
Raw Material:O-2 with Surface Treatment Black Oxide

Hardness:50-52 HRC

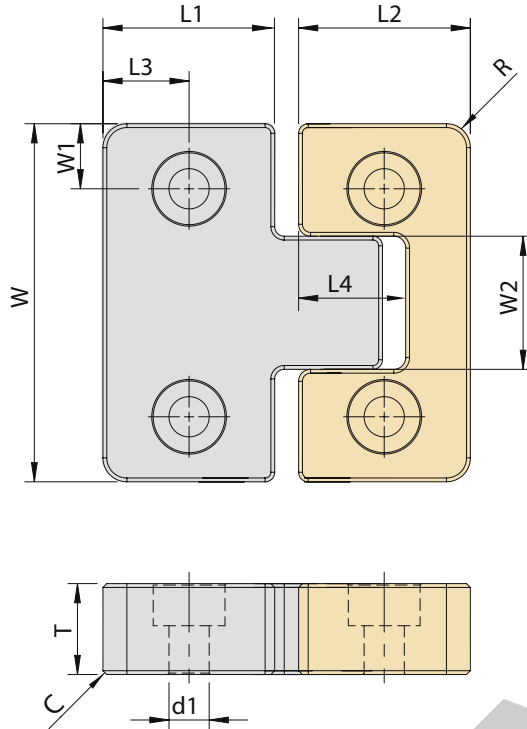

VB

Code	L	L1	L2	L3	L4	W	W1	W2	T	d1	R	C	Stock
VB6.8/ 50	43	21.5	21.5	11	13	50	8	17	16	6.5	5	0.8	•
VB6.8/ 75	72	36	36	18	22.5	75	12.5	25	19	10.5	5	0.8	•
VB6.8/ 100	90	45	45	22	30	100	15	35	19	10.5	5	0.8	•
VB6.8/ 125	90	45	45	22	28.7	125	20.5	35	25	10.5	5	0.8	•

✓ - Ex-stock • - Against Order | Ordering Example: Code - Quantity | VB6.8/ 125- 4 Pcs (1 Piece = 1 Male + 1 Female)

