


VF1.7


Raw Material: Spring Steel - 1.2101
Hardness: 42-48HRC

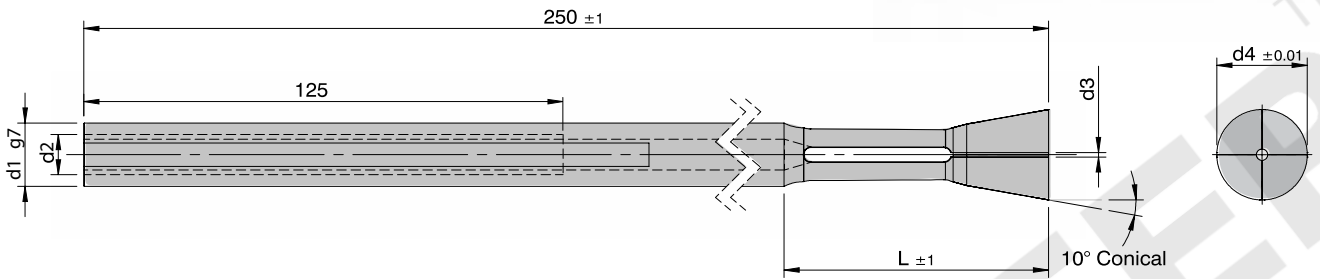

Code	d1	d2	d3	d4	L	d10	W1	W2	W3	Min Ejector Stroke(S)	Stock
VF1.7/ 001	14	M8	2.5	20	59	14	13	1.6	3	15	●
VF1.7/ 002	16	M10	3.5	26	76	18	20	2.5	4	15	●
VF1.7/ 003	27	M18	4	38	89	30	27	3	4	20	●
VF1.7/ 004	34	M24	5.5	50	101	40	39	3.5	5	20	●

√ - Ex-stock ● - Against Order | Ordering Example: Code - Quantity | VF1.7/ 004 - 5 Pcs

VF

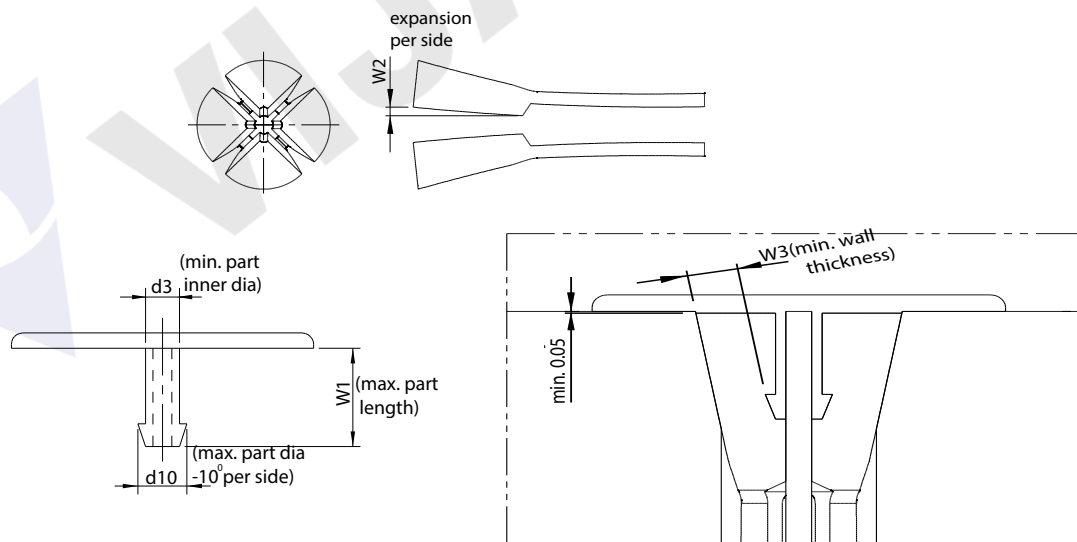

◆ Note : Sprung Core 1.7 comes with two mounting sets which are to be ordered separately. Please refer to the details below.

Hollow Bolt Set Includes : Key (40 x 8 x 7 thick), Hollow bolt, Std. DIN HDS Ejector Pin (d5 x 400 long), Spacer.



Pin Bolt Set Includes : Key (40 x 8 x 7 thick), Threaded bolt/pin. HDS(40-44 HRC)(d7 x 400 long), Spacer.

VF1.7

Raw Material: Spring Steel - 1.2101
Hardness: 42-48HRC



Hollow Bolt Set

Hollow Bolt Set Code	Pin dia d5	Bolt Thread d6	SPACER ID x OD X T	d9
VF1.7/2/ 001	3.5	M8-1.25x40	8x22x4	14
VF1.7/2/ 002	4	M10-1.5x40	10x23x4	16
VF1.7/2/ 003	10	M18-2.5x50	19x33x6	27
VF1.7/2/ 004	14	M24-3x55	25x42x6	34

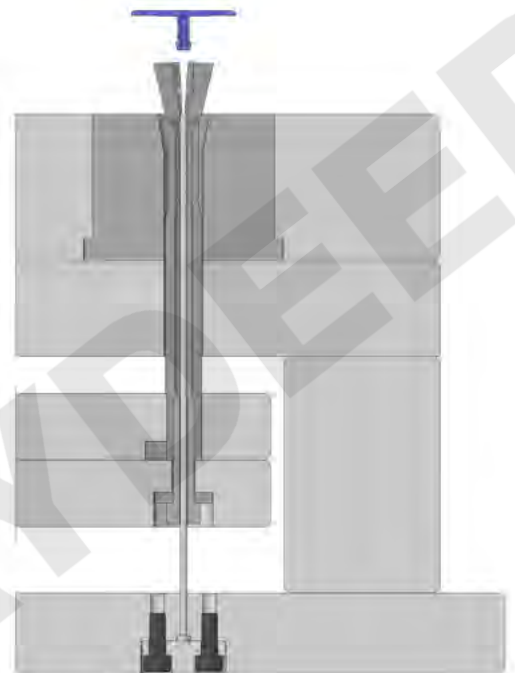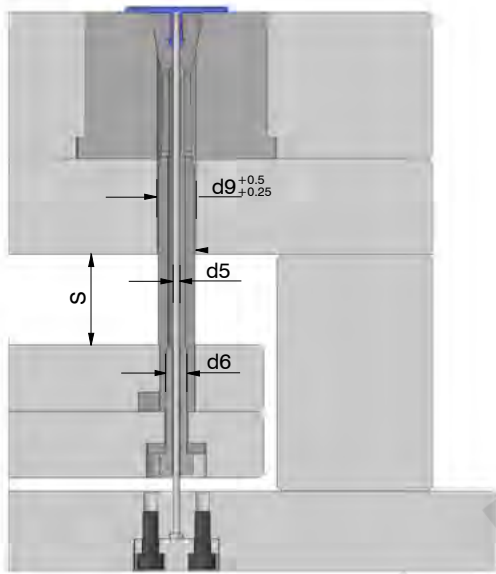

Pin Bolt Set

Pin Bolt Set Code	Pin dia d7	Bolt Thread d8	SPACER ID x OD X T	d9
VF1.7/1/ 001	6	M8-1.25	8x22x4	14
VF1.7/1/ 002	7.7	M10-1.5	10x23x4	16
VF1.7/1/ 003	14.5	M18-2.5	19x33x6	27
VF1.7/1/ 004	19.8	M24-3	25x42x6	34

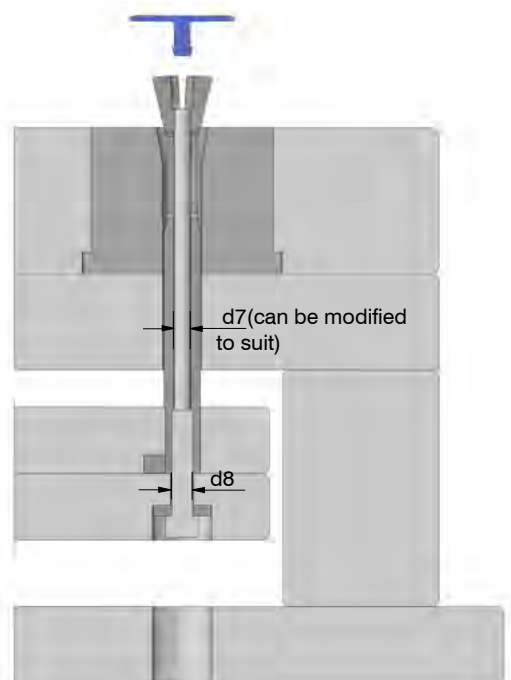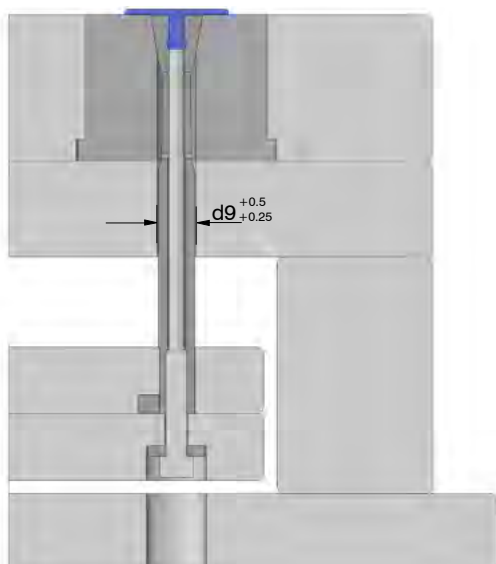

VF