


VK12

Raw material: 1.2343
Hardness: ~45 HRC

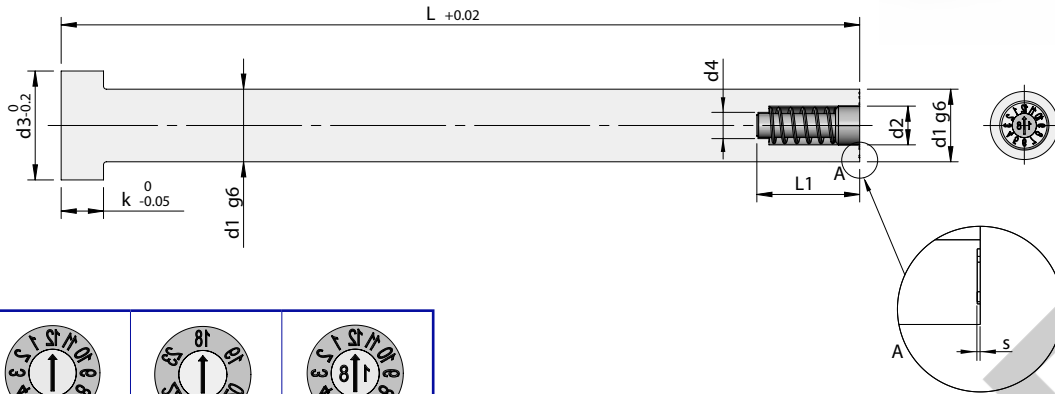

VK12.1	VK12.2	VK12.3
Only Month	Only Year	Month & Year

Code	d1	d2	d3	d4	L1	k	s	Stock
VK12.1/5	5	3.1	10	M1.6x0.2	13	3	0.2	•
VK12.1/6	6	3.1	12	M1.6x0.2	13	5	0.2	•
VK12.1/8	8	4.6	14	M2.5x0.35	14	5	0.35	•
VK12.1/10	10	4.6	16	M2.5x0.35	14	5	0.35	•
VK12.1/12	12	6.4	18	M3x0.5	17	7	0.5	•
VK12.2/5	5	3.1	10	M1.6x0.2	13	3	0.2	•
VK12.2/6	6	3.1	12	M1.6x0.2	13	5	0.2	•
VK12.2/8	8	4.6	14	M2.5x0.35	14	5	0.35	•
VK12.2/10	10	4.6	16	M2.5x0.35	14	5	0.35	•
VK12.2/12	12	6.4	18	M3x0.5	17	7	0.5	•
VK12.3/5	5	3.1	10	M1.6x0.2	13	3	0.2	•
VK12.3/6	6	3.1	12	M1.6x0.2	13	5	0.2	•
VK12.3/8	8	4.6	14	M2.5x0.35	14	5	0.35	•
VK12.3/10	10	4.6	16	M2.5x0.35	14	5	0.35	•
VK12.3/12	12	6.4	18	M3x0.5	17	7	0.5	•

✓ - Ex-stock • - Against Order | Ordering Example: Code - Quantity | VK12.3/12 -5 pcs

◆ Note: Length(L) as per customer's requirement